

*Hydraulic Excavators*

**DP 4**  
**DP 5**

*Top technology!*  
*Top effect!*



In-house development and production  
according to CE standards




Schlingenerstraße 2a ▪ D-87668 Rieden ▪ Tel.: +49 8346 982026  
E-Mail: [info@ostler-maschinenbau.com](mailto:info@ostler-maschinenbau.com) ▪ [www.ostler-maschinenbau.com](http://www.ostler-maschinenbau.com)

## Technical Data

	DP 4	DP 5
Maximum range	4,000 mm	5,000 mm
Maximum discharge height	4,300 mm	5,000 mm
Maximum operational depth of dipper shovel	2,200 mm	3,000 mm
Maximum operational depth of earth scoop	2,600 mm	3,250 mm
Overall width	1,900 mm	1,900 mm
Diameter of turntable	500 mm	700 mm
Torque	1,020 Nm	1,620 Nm
Slewing range	endless	endless
Unladen weight without tools	700 kg	950 kg
Lifting capacity without tools	500-950 kg	900-1,430 kg
Speed of power take-off shaft	540 revs/min.	540 rev/min.
Necessary tractor minimum	50 cont. hp.	90 cont. hp.

Dimensions are not binding.  
Changes in design may be subject to alterations.

*Universal use for excavator operation, loading of timber and dung as well as communal and recycling purposes!*

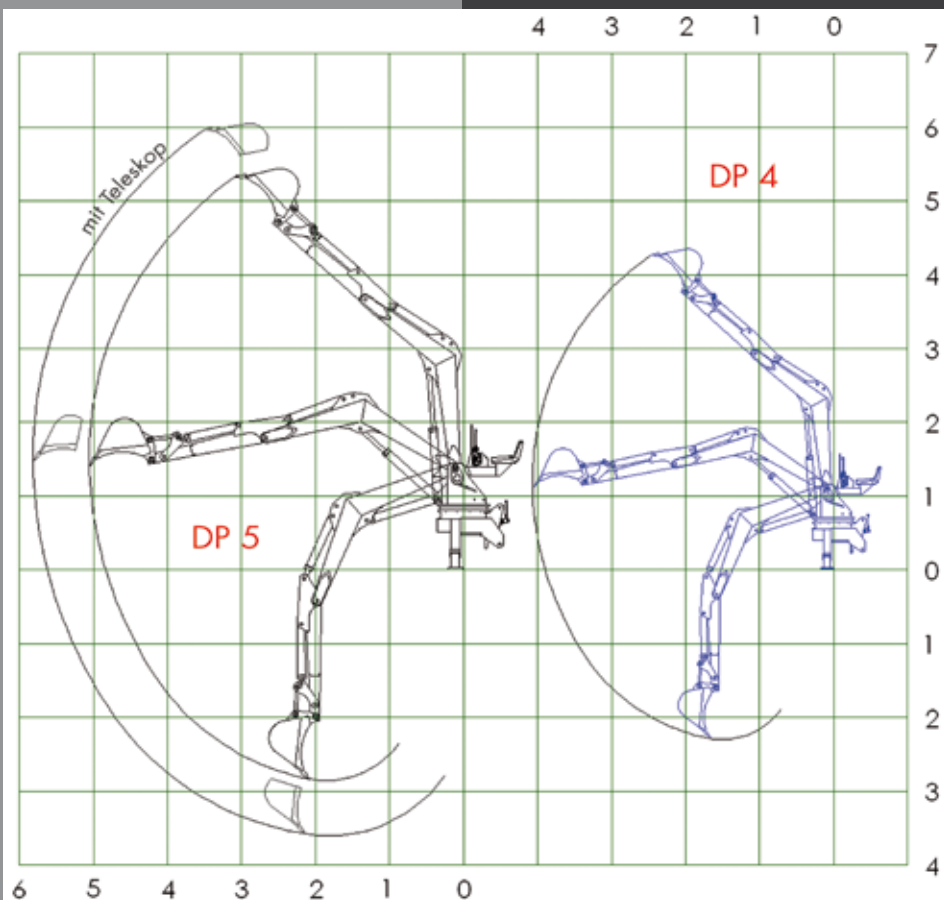

*Optimum CAD-developed kinematics!  
Cone shaped dipper shovel for better discharge of bulk material!*

## Standard equipment

- Control valve for hydraulic locking
- Endless slewing range
- Three-point linkage, category 2
- Rigid mounting of hydraulic pump
- Oil tank with return filter and inspection glass
- Heavy duty slew transmission 1:5



## Special equipment

- Hydraulic support, separately controllable
- Hydraulic locking system
- 2-lever (EURO) control
- Dung clam, earth scoop
- Timber clam with rotation servo
- Dipper shovel and ditch shovel

