

Universal Loader K260





Technical Data

Engine, Euro Stage III:	Kubota, 4-cyl., turbo-diesel, water cooled, 33 kW (45 HP)
Engine, Euro Stage V:	Kubota, 4-cyl. gasoline engine, water cooled, 43 kW (58 HP)
Lifting capacity:	1200 kg standard, 1600 kg with lifting cylinders Ø 115mm and counter weights, (max. 300 kg)
Lifting height:	3300 mm, lower side of pallet fork
Tipping load:	1300 kg, straight in-line, telescope retracted
Front axle:	Telescopic front axle, total width 1207-1837mm
Rear axle:	Pendulous rear axle
Front loader:	Hydraulic telescopic lift mast, max. height 3.3 m
Drive:	All-wheel, hydrost. drive at each wheel, TwinLock, 0-18 km/h
Driving hydraulic:	Adjustable axial piston pump, 116 l/min, 400 bars, 4 fully hydraulic wheel motors
Working hydraulics:	Gear type pump, 49.5 l/min, 180 bars
Service brake:	By hydrostatic drive, on all wheels
Parking brake:	Spring loaded brake inside front wheels motors
Tyres standard:	10.0/75 – 15.3AS, total loader width 1.207-1.837 m
narrow:	7,50x16A-504 94/150/5 ET159 ET117, width 1.015-1.645 m
Driver seat:	Comfort seat, safety belt, integrated contact switch
Steering column:	Comfort steering column, inclination adjustable, operating hours counter, fuel gauge
Tool carrier:	EURO-Norm with mech. locking or narrow tool carrier
Diesel / oil tank	Integrated safety tanks, 20 l / 40 l
Empty weight:	2060 kg (front/rear axle 590/1470 kg)
Turning radius:	Inside 1180 mm, outside 2180 mm, articulating angle 55°


Data for information only, modifications reserved



Universal Loader K260

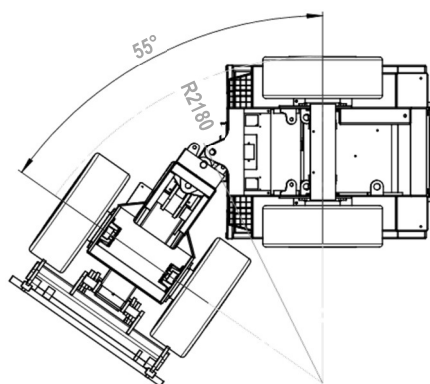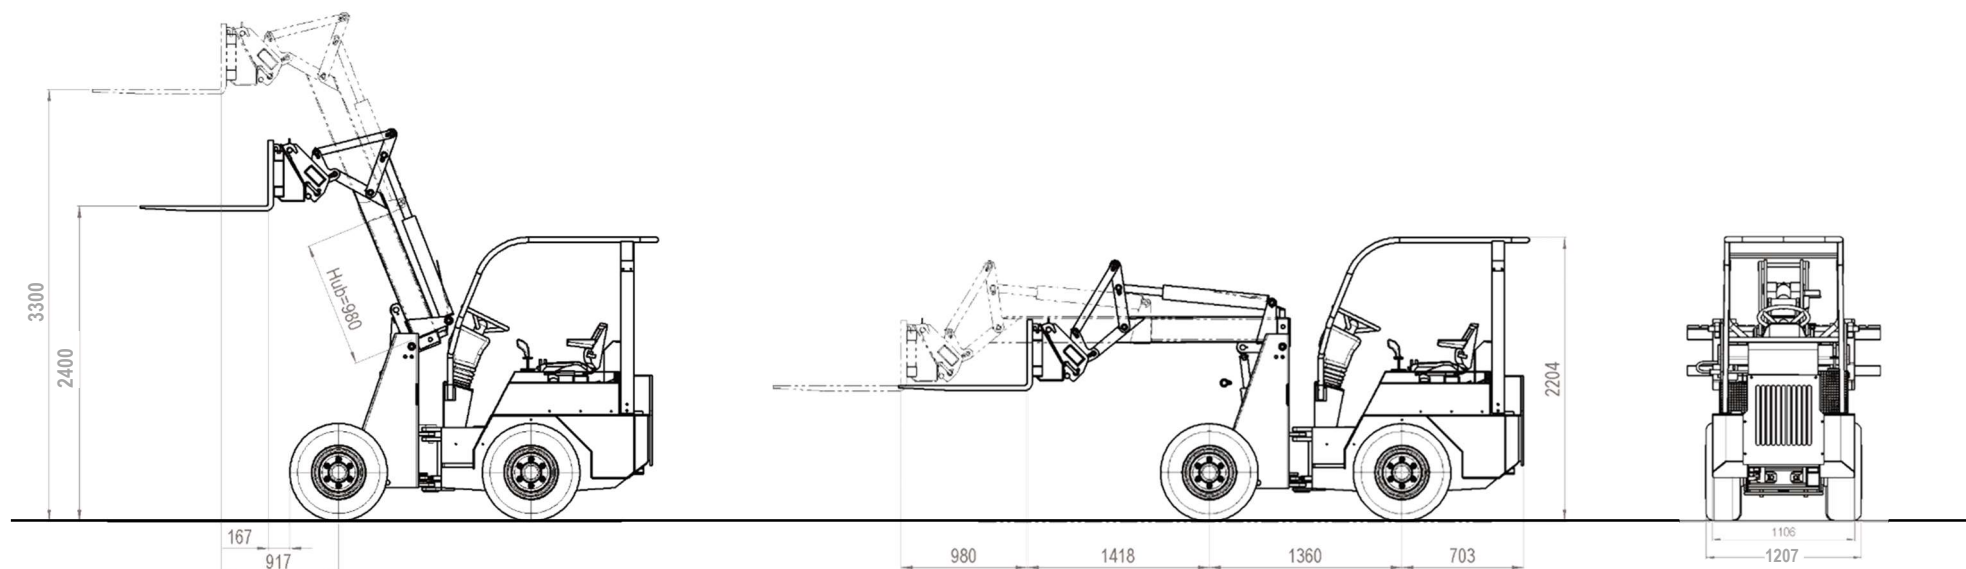

Data for information only, modifications reserved

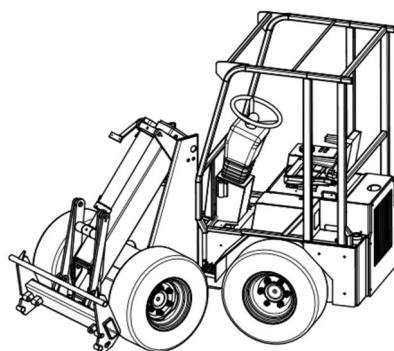

- Very short
- Narrow Chassis, width 1.10 m
- Low height of only 2.20 m
- Small turning radius of 2.18 m
- High lifting height up to 3.30 m
- High lifting capacity up to 1.6 to
- Telescopic front axle
- **Extreme compactness, manoeuvrability, with high working area and lifting capacity**

