

Universal Loader K260





Technical Data

Engine, Euro Stage IIIA:	Kubota, 4-cyl., turbo-diesel, water cooled, 32 kW / 44 HP, 3000 rpm
Engine, Euro Stage V:	Kubota, 4-cyl., petrol, water cooled, 43 kW / 58 HP, 3600 rpm
Lifting capacity:	1200 kg standard, 1600 kg with lifting cylinders Ø 115mm and counter weights, (max. 300 kg)
Lifting height:	3300 mm, lower side of pallet fork
Tipping load:	1300 kg, straight in-line, telescope retracted
Front axle:	Telescopic front axle, total width 1240 mm
Rear axle:	Standardly stiff, optionally pendulous
Front loader:	Hydraulic telescopic lift mast, max. height 3.3 m
Drive:	All-wheel, hydrost. drive at each wheel, TwinLock™, 0-18 km/h
Driving hydraulic:	Adjustable axial piston pump, 400 bars, 4 fully hydraulic wheel motors with TwinLock™ in direct drive
Working hydraulics:	Diesel Engine, Gear type pump, 49,5 l/min, 180 bar
Working hydraulics:	Petrol Engine, Gear type pump, 58 l/min, 180 bar
Service brake:	By hydrostatic drive, on all wheels
Parking brake:	Spring loaded brake, rear
Tyres:	Standardly: 10.0/75 – 15.3AS, total loader width 1.24 - 1.84 m
Driver seat:	Comfort seat with integrated contact switch, safety belt
Steering column:	Comfort steering column, inclination adjustable, with counter for operating hours, fuel gauge
Tool carrier:	"Krüger"-mould plate (2.60 m length), EURO-Norm 2.90 m length
Fuel / oil tank	Integrated safety tanks, 20 l / 40 l
Empty weight:	2060 kg (front/rear axle 590 / 1470 kg)
Turning radius:	Inside 1180 mm, outside 2180 mm, articulating angle 55°

Data for information only, modifications reserved, V 2.3



Universal Loader K260

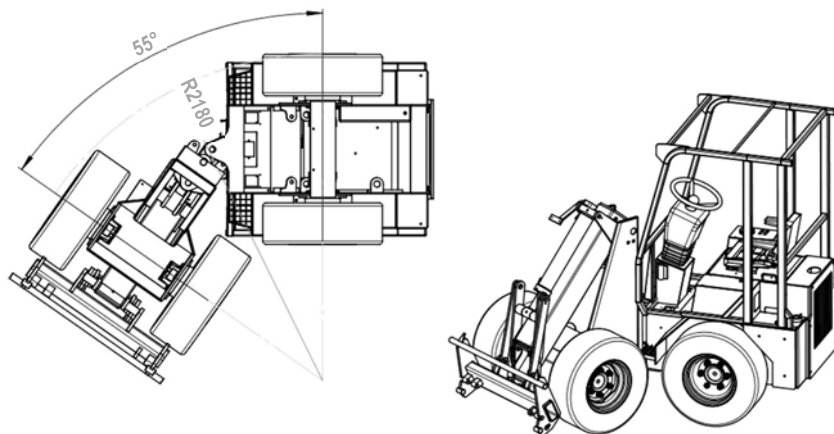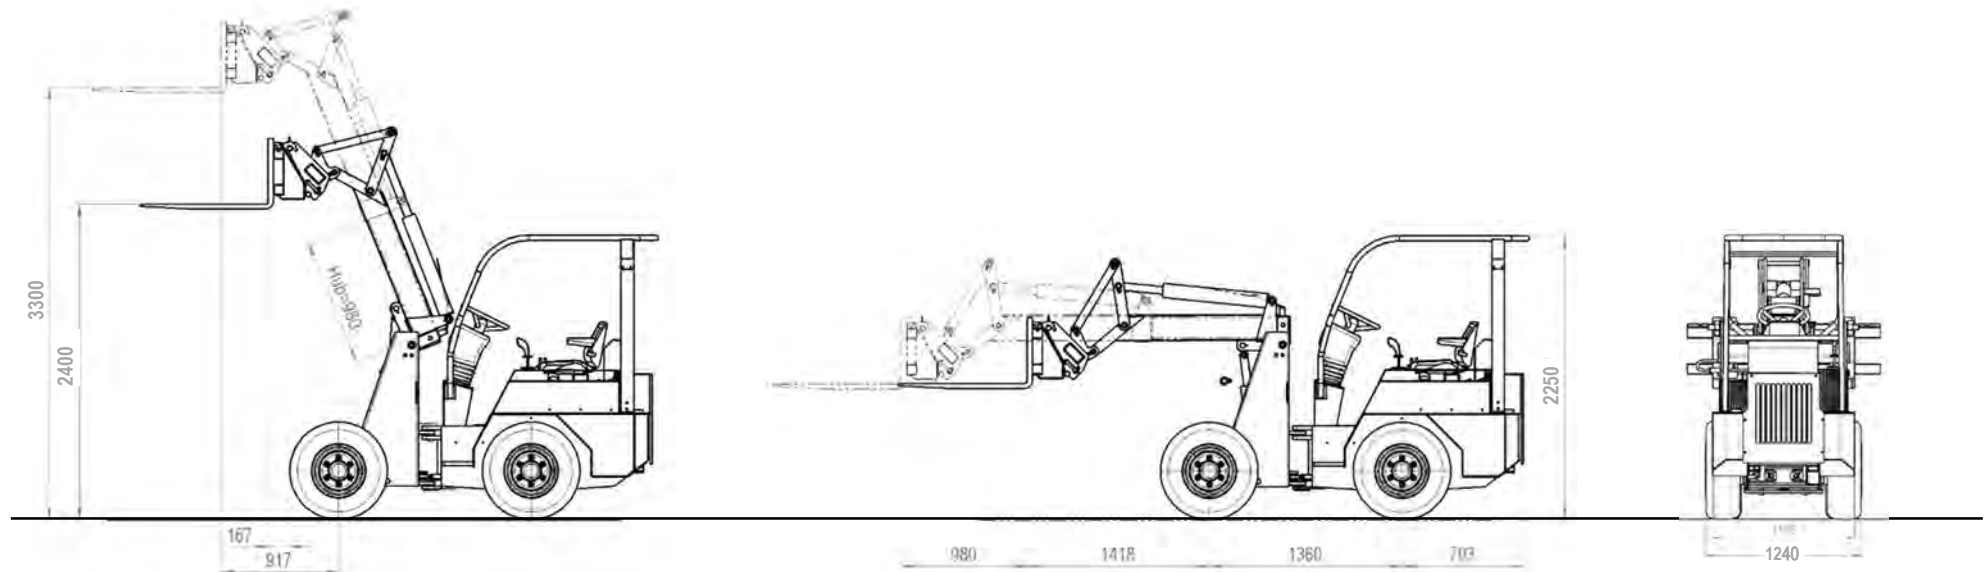

- Total length by "Krüger"- mould plate only 2.60 m
- Low height of only 2.25 m
- Small turning radius of 2.18 m
- High lifting height up to 3.30 m
- High lifting capacity up to 1.6 to
- Telescopic front axle

➤ **Extreme compactness, manoeuvrability, with high working area and lifting capacity**

Data for information only, modifications reserved, V 2.3

Universal Loader K260



DE OSTLER KNIKLADER K260 ALTIJD BIJ U!

Met trots presenteren wij de nieuwste telg van Ostler telekniekladers. Deze zeer compacte machine is speciaal op ons verzoek ontwikkeld om achter de cabine van uw vrachtwagen mee te nemen! De maatvoering is dusdanig aangepast dat hij precies 260 cm lang is geworden en doormiddel van rijplaten van en op de laadbak gereden kan worden.

Deze kniklader heeft een telescopische hefarm waarmee eveneens een hefhoogte van 330 cm bereikt wordt. Door zijn uitschuifarm is de lading van een kant te lossen. Tevens is deze kniklader uitgerust met de bekende uitschuifbare vooras waardoor de stabiliteit enorm toeneemt! Met zijn 42 pk Perkins motor en zware poelain wielmotoren kan hij moeiteloos het zwaarste werk aan! De snelheid kan traploos van 0 tot 15 km p/uur geregeld worden. Voor zijn Ostler-snelwisselsysteem zijn er vele opties en aanhouddelen te verkrijgen. Op de vrachtauto neemt u dit raspaardje zudoende razendsnel mee naar elk werk.

De in een oogwenk uitschuifbare vooras zit ook onder de K260 gemonteerd.



Customer: Gebr. de Visser, Netherlands