

Universal Loader K2 S




Technical Data

Engine, Euro Stage V :	Kubota, 4-zyl. diesel, 18.5 kW / 25 HP, 2300 rpm
Engine, Euro Stage V :	Kubota, 4-zyl. petrol, 43 kW / 58 HP 3600 rpm
Lifting capacity:	1200 kg standard, (1.400 kg with add. counterweights 200 kg)
Lifting height:	3060 mm, lower side of pallet fork
Tipping load:	1200 kg, straight in-line
Front axle:	Stiff, optionally with telescope (width 1240-1837)
Rear axle:	Pendulous
Front loader:	Swing arm, max. height 3.06 m
Drive:	All-wheel, hydrostatic drive at each wheel, 0-20 km/h
Driving hydraulic:	Adjustable axial piston pump, 400 bars, 4 fully hydraulic wheel motors in direct drive
Working hydraulics:	Diesel Engine: Gear type pump, 37 l/min, 180 bars Petrol Engine: Gear type pump, 58 l/min, 180 bars
Service brake:	By hydrostatic drive, on all wheels
Parking brake:	Spring loaded brake inside rear wheel motors
Tyres:	Standard 10.0/75 – 15.3AS, tot. loader width 1.24 m Optionally 31 x 15.50-15 tot. loader width 1.40 m
Driver seat:	Comfort seat with integrated contact switch, safety belt,
Steering column:	Comfort steering column, inclination adjustable, with operating hours counter, fuel gauge
Tool carrier:	EURO-Norm with mechanical locking
Diesel / oil tank	Integrated safety tanks, 20 l / 40 l
Empty weight:	Approx. 2060kg (front/rear axle 590/1470 kg) with standard tyres
Turning radius:	Inside 1350 mm, outside 2550 mm, articulating angle 55°

Data for information only, modifications reserved, V 2.3



Universal Loader K2 S

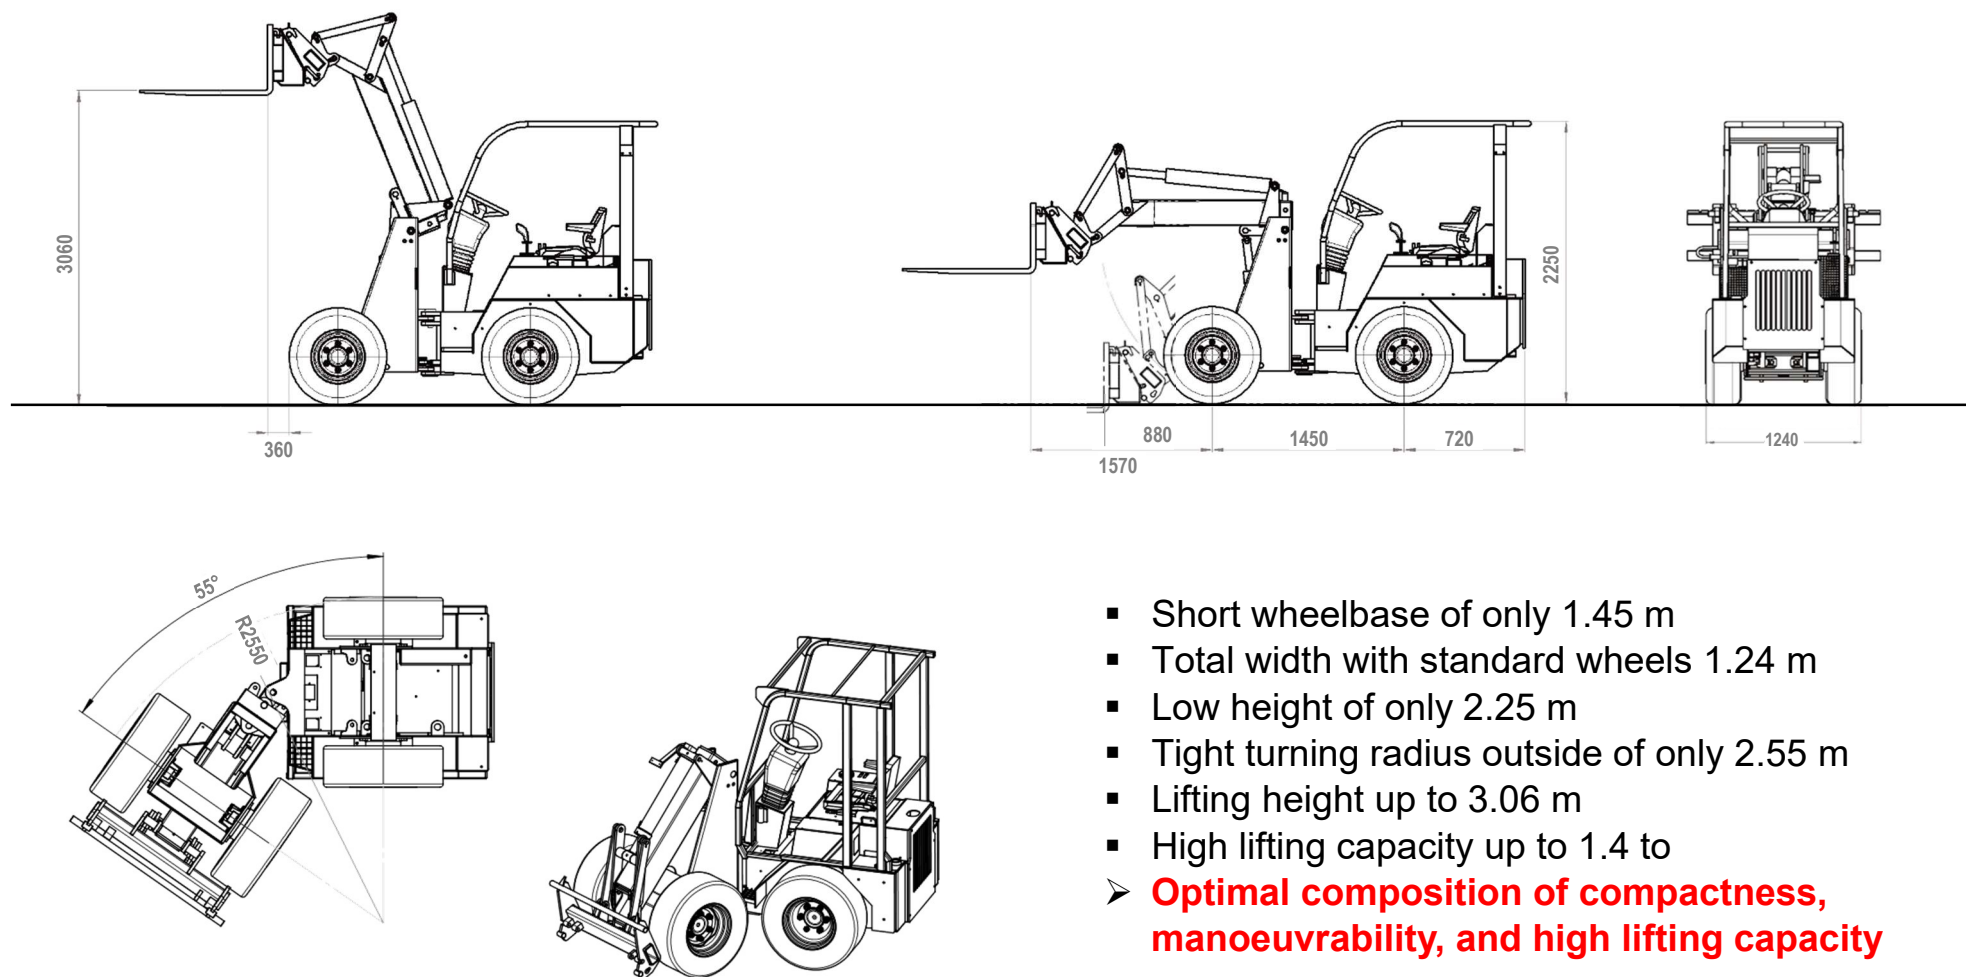

- Short wheelbase of only 1.45 m
- Total width with standard wheels 1.24 m
- Low height of only 2.25 m
- Tight turning radius outside of only 2.55 m
- Lifting height up to 3.06 m
- High lifting capacity up to 1.4 to
- **Optimal composition of compactness, manoeuvrability, and high lifting capacity**

Data for information only, modifications reserved, V2.3